




d1000



d1001

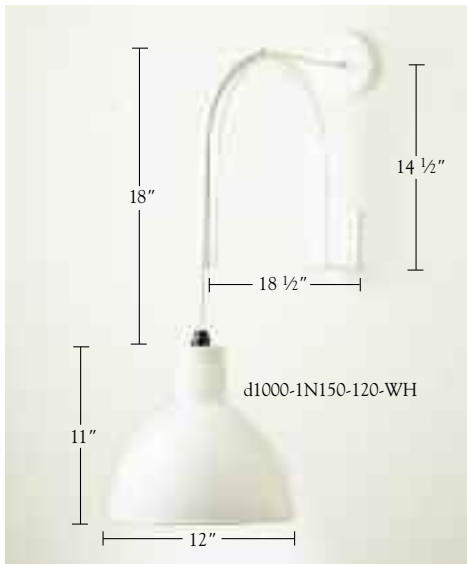

Item #	Lamping	Voltage	Finish	Options	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Work space for submittals

How to specify

Example from illustration at left

d1000	-1N150	-120	-WH	<input type="text"/>	<input type="text"/>
-------	--------	------	-----	----------------------	----------------------

Item Number

d1000
d1001

12" diam. INDUSTROLITE with bracket
16" diam. INDUSTROLITE with bracket

Construction

Spun heavy gauge aluminum shade. 5" diam. steel canopy. White, three conductor hanging cord. Steel bracket is 1/4" thick by 1 1/2" wide. UL listed, cUL certified for dry locations.

Lamping / Wattage

Fixtures supplied less lamps.
Lamps may be ordered from d'ac.

1N150
1F13
1F18
1F26
1F32

Incandescent, one 150 W, medium base, A type
Fluorescent, one 13 W quad, 4 pin, electronic HPF ballast
Fluorescent, one 18 W quad, 4 pin, electronic HPF ballast
Fluorescent, one 26 W triple tube, 4 pin, electronic HPF ballast
Fluorescent, one 32 W triple tube, 4 pin, electronic HPF ballast

Voltage

120 120V 277 277V

Finishes

See Page d9000 for color renderings

AL Brushed Aluminum	PA Polished Aluminum	<i>Baked Enamels:</i>
WH White Gloss	G1 Light Grey	G2 Medium Grey
MG Metallic Grey	AN Metallic Anthracite	BG Black Gloss
MB Matte Black	BC Black Crinkle	CU Metallic Copper
BZ Metallic Bronze	T1 Light Tan	T2 Medium Tan
GM Metallic Green	SF Seafoam	BL Metallic Blue
RD Metallic Red	RB Bright Red	MP Magenta Pink
YL Bright Yellow	SCF Special Finish—must supply paint chip	

Options

BHC Black, three conductor hanging cord

Special Orders

For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.