




d5000



d5001

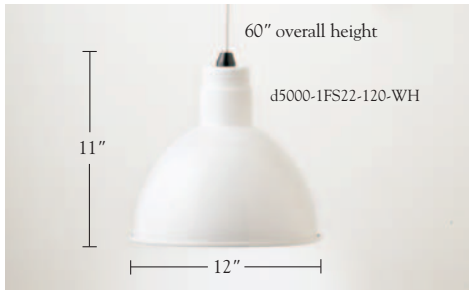

Item #	Lamping	Voltage	Finish	Options	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Work space for submittals

**How to specify**

Example from top left illustration

<b>d5000</b>	<b>-1N150</b>	<b>-120</b>	<b>-WH</b>	<input type="text"/>	<input type="text"/>
--------------	---------------	-------------	------------	----------------------	----------------------

**Item Number**

**d5000**  
**d5001**

12" diam. INDUSTROLITE pendant  
16" diam. INDUSTROLITE pendant

**Construction**

Spun heavy gauge aluminum shade. 5" diam. steel canopy.  
White, three conductor hanging cord.  
For standard ceiling junction box mounting.  
UL listed, cUL certified for dry locations.

**Lamping / Wattage**

*Fixtures supplied less lamps.  
Lamps may be  
ordered from d'ac.*

**1N150**  
**1F13**  
**1F18**  
**1F26**  
**1F32**

Incandescent, one 150 W, medium base, A type  
Fluorescent, one 13 W quad, 4 pin, electronic HPF ballast  
Fluorescent, one 18 W quad, 4 pin, electronic HPF ballast  
Fluorescent, one 26 W triple tube, 4 pin, electronic HPF ballast  
Fluorescent, one 32 W triple tube, 4 pin, electronic HPF ballast

**Voltage**

**120**    120V    **277**    277V

**Finishes**

*See Page d9000 for  
color renderings*

<b>AL</b> Brushed Aluminum	<b>PA</b> Polished Aluminum	<i>Baked Enamels:</i>
<b>WH</b> White Gloss	<b>G1</b> Light Grey	<b>G2</b> Medium Grey
<b>MG</b> Metallic Grey	<b>AN</b> Metallic Anthracite	<b>BG</b> Black Gloss
<b>MB</b> Matte Black	<b>BC</b> Black Crinkle	<b>CU</b> Metallic Copper
<b>BZ</b> Metallic Bronze	<b>T1</b> Light Tan	<b>T2</b> Medium Tan
<b>GM</b> Metallic Green	<b>SF</b> Seafoam	<b>BL</b> Metallic Blue
<b>RD</b> Metallic Red	<b>RB</b> Bright Red	<b>MP</b> Magenta Pink
<b>YL</b> Bright Yellow	<b>SCF</b> Special Finish—must supply paint chip	

**Options**

**BHC** Black, three conductor hanging cord    **STEM** Rigid, 1/2" diam. stem  
**CEQ** California Earthquake Swivel—must use rigid stem

**Special Orders**

For modifications to dimensions, electrical requirements and other special orders,  
please contact your d'ac representative.