





d5030 Stadio (14" diam.) and  
d5029 Mini-Stadio (9 1/2" diam.) pendants

d'ac studio design



d5029-1F26-120-AL

# d5029MINI

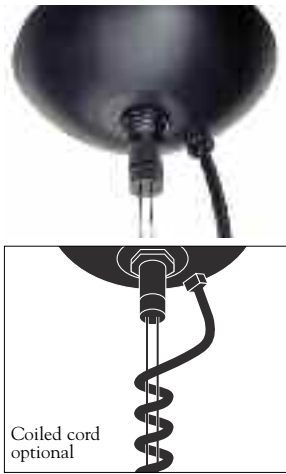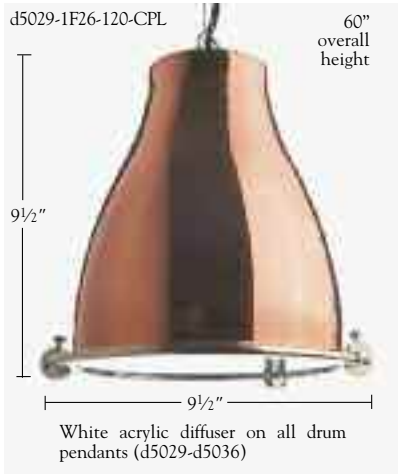

Item #	Lamping	Voltage	Finish	Options	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Work space for submittals

### How to specify

Example from illustration at left

d5029	-1F26	-120	-CPL	<input type="text"/>	<input type="text"/>
-------	-------	------	------	----------------------	----------------------

<b>Item Number</b>	d5029	MINI-STADIO pendant / d'ac studio design
<b>Construction</b>	Spun aluminum or solid copper shade. Polished chrome trim, clamps and loop. White opal acrylic diffuser. 5" diam. black canopy. Adjustable height, aircraft cables support fixture. Black, 3 conductor cord. 60" overall height. For standard ceiling junction box mounting. UL listed, cUL certified for dry, damp and wet locations.	

<b>Lamping / Wattage</b>	<b>1N75</b>	Incandescent, one 75 W, medium base, A type
<i>Fixtures supplied less lamps.</i>	<b>1F13</b>	Fluorescent, one 13 W quad, 4 pin, electronic HPF ballast
<i>Lamps may be ordered from d'ac.</i>	<b>1F18</b>	Fluorescent, one 18 W quad, 4 pin, electronic HPF ballast
	<b>1F26</b>	Fluorescent, one 26 W triple tube, 4 pin, electronic HPF ballast

<b>Voltage</b>	120	120V	277	277V
----------------	-----	------	-----	------

<b>Finishes</b> <i>See Page d9000 and d9000A for color renderings</i>	<b>AL</b> Brushed Aluminum	<b>PA</b> Polished Aluminum	<i>Baked Enamels:</i>	
	<b>WH</b> White Gloss	<b>G1</b> Light Grey	<b>G2</b> Medium Grey	
	<b>MG</b> Metallic Grey	<b>AN</b> Metallic Anthracite	<b>BG</b> Black Gloss	
	<b>MB</b> Matte Black	<b>BC</b> Black Crinkle	<b>CU</b> Metallic Copper	
	<b>BZ</b> Metallic Bronze	<b>T1</b> Light Tan	<b>T2</b> Medium Tan	
	<b>GM</b> Metallic Green	<b>SF</b> Seafoam	<b>BL</b> Metallic Blue	
	<b>RD</b> Metallic Red	<b>RB</b> Bright Red	<b>MP</b> Magenta Pink	
	<b>YL</b> Bright Yellow	<b>SCF</b> Special Finish—must supply paint chip		
	<b>Solid Copper Finishes:</b>	<b>CPL</b> Polished Copper ( <i>lacquered</i> )	<b>CBL</b> Brushed Copper ( <i>lacquered</i> )	
		<b>CPU</b> Polished Copper ( <i>unlacquered – will naturally tarnish over time</i> )		
	<b>CBU</b> Brushed Copper ( <i>unlacquered – will naturally tarnish over time</i> )			

<b>Options</b>	<b>WET</b> UL listed for wet and damp locations	<b>STEM</b> Rigid, 1/2" diam. stem (aircraft cable and cord replaced by 1/2" diam. rigid stem and modified canopy)
	<b>COIL</b> Coiled electrical cord.	
	<b>TR</b> Fixture can be modified for use with track systems. (adapter & track supplied by others)	
	<b>INCP</b> Inner shade in raw copper vs. painted white (standard on fixture) for copper finishes.	

<b>Special Orders</b>	For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.
-----------------------	---