

Wooding Design



d5140-1N150-120-AN-MG

d5140-1N150-120-AN-MG




Item #	Lamping	Voltage	Ring Finish	Knob Finish	Options	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Work space for submittals

How to specify

Example from illustration at left

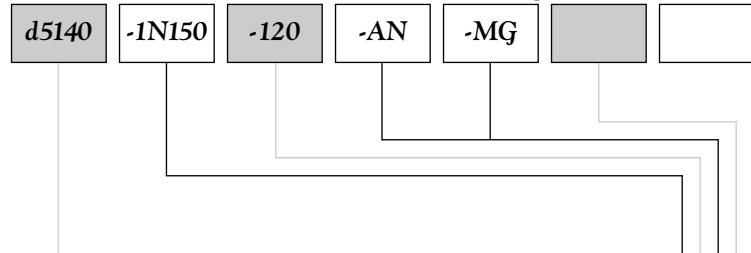

Item Number d5140 CHILMARK downlight / Wooding Design

Construction Sandblasted white glass shade. Aluminum spun rings. Aircraft cables and nautical fittings support shade and ring. Perforated metal cylinder. 5" diam. canopy. For standard ceiling junction box mounting. UL listed, cUL certified for dry locations.

Lamping / Wattage 1N150 Incandescent, one 150 W, medium base, A type (Silver bowl type may be preferable)
 1F32 Fluorescent, one 32 W, triple tube, 4 pin, electronic HPF ballast, (requires 2" deep canopy)
All fixtures are supplied less lamps. Lamps may be ordered from d'ac.

Voltage 120 120V 277 277V

Ring & Knob Finishes

See Page d9000 for color renderings

- | | | |
|----------------------------|--|---------------------------|
| AL Brushed Aluminum | PA Polished Aluminum | |
| Baked Enamel Finishes: | | |
| WH White Gloss | G1 Light Grey | G2 Medium Grey |
| MG Metallic Grey | AN Metallic Anthracite | BG Black Gloss |
| MB Matte Black | BC Black Crinkle | CU Metallic Copper |
| BZ Metallic Bronze | T1 Light Tan | T2 Medium Tan |
| GM Metallic Green | SF Seafoam | BL Metallic Blue |
| RD Metallic Red | RB Bright Red | MP Magenta Pink |
| YL Bright Yellow | SCF Special Finish—must supply paint chip | |
- Cables and connectors available only in natural steel finish.*

Options BLF Acrylic bottom lens—flat (clear)
 CEQ California Earthquake Swivel

Special Orders For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.