


d8037-1FC22/40-120-AL





\uparrow 2¹/₂" for d8035 & d8036
 \uparrow 3¹/₄" for d8037



d8035
d8036
d8037



d8037-2FC22/40-120-AL

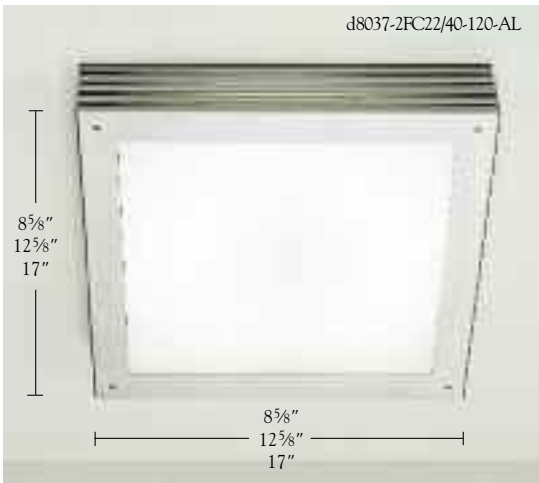

Item #	Lamping	Voltage	Trim Finish	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Work space for submittals

How to specify

Example from illustration at left

d8037	-2FC22 /40	-120	-AL	<input type="text"/>
-------	---------------	------	-----	----------------------

Item Number	d8035	d8036	d8037
	STRATO SQUARE 8 5/8" ceiling fixture/wall sconce ADA	STRATO SQUARE 12 5/8" ceiling fixture/wall sconce ADA	STRATO SQUARE 17" ceiling fixture/wall sconce ADA
			Dijkstra Lampen

Construction Aluminum body. Sandblasted opal glass lens.
Perforated aluminum side diffuser.
Electronic ballast integrated in the fixture.
The d8035/d8036 have four tiers.
The d8037 has five tiers.
For standard wall junction box mounting.
UL listed, cUL certified for dry locations.

Lamping / Wattage	1FM13	2C40	1FC22	2N60	1FC40	2FC22/40	3N60
For d8035	Fluorescent, one 13 W quad, 2 pin, electromagnetic NPF ballast	Incandescent, two 40 W, candelabra base, B-10 type					
For d8036			Fluorescent, one 22 W circline, T5 type, 2GX13 base, electronic HPF ballast	Incandescent, two 60 W, medium base, T-10 type			
For d8037					Fluorescent, one 40W Circline, T5 type, 2GX13 base, electronic HPF ballast	Fluorescent, one 22W and one 40W Circline, T5 type, 2GX13 base, electronic HPF ballast	Incandescent, three 60 W, medium base, T-10 type
							All fixtures are supplied less lamps. Lamps may be ordered from d'ac.

Voltage	120	120V	277	277V
Fixture Finish	AL	Brushed Aluminum (painted)		
Special Orders	For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.			