



d1601

STELLA WALL FIXTURE


PROJECT: _____
 TYPE: _____
 QUANTITY: _____
 NOTES: _____

SPECIFICATION


CONSTRUCTION	Precision-formed aluminum
DIFFUSER	Acrylic side diffuser, painted white
ACCENTS	Contrasting or tonal fasteners
MOUNTING	Standard wall junction box
FINISH	Metal or powder coat paint
VOLTAGE	120V or 277V
LIGHT SOURCE	Dedicated LED
DIMMING	Non-dimming, 0-10V, ELV, or TRIAC
DIMENSIONS	11.4" Width x 14.2" Height
DEPTH	3.25"
CODE COMPLIANCE	UL listed, cUL (ETL/ETLc for LED) certified for dry locations



DIMENSIONS

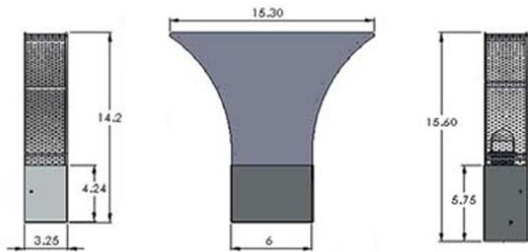

ORDERING INFORMATION

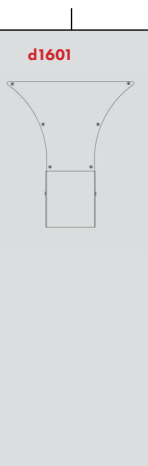MODEL	LAMPING	VOLTAGE	FINISH	OPTIONS
 <p>d1601</p>	<p>LED16² 16W LED, 1700 TOTAL LUMENS</p>	<p>120¹ 120V 277 277V</p>	<p>METAL FINISHES</p> <p>PA POLISHED ALUMINUM</p> <p>PAINTED FINISHES</p> <p>BG BLACK GLOSS BL METALLIC BLUE RD METALLIC RED CU METALLIC COPPER T1 LIGHT TAN G2 MEDIUM GREY GM METALLIC GREEN MB MATTE BLACK MG METALLIC GREY YL BRIGHT YELLOW BC BLACK CRINKLE</p>	<p>DIM³ DIMMING: 0-10V, TRIAC, OR ELV DNLT DOWN LIGHT (4W LED) PERF PERFORATED SIDE DIFFUSER</p> <p>WH WHITE GLOSS T2 MEDIUM TAN AN METALLIC ANTHRACITE SF SEAFOAM MP MAGENTA PINK BZ METALLIC BRONZE SCF SPECIAL COLOR FINISH</p>
<p>NOTES</p> <ol style="list-style-type: none"> 1. FIXTURES ARE FACTORY PREWIRED FOR 120V UNLESS OTHERWISE SPECIFIED. 2. 3000K IS THE STANDARD COLOR TEMPERATURE UNLESS OTHERWISE SPECIFIED; ALSO AVAILABLE IN 2700K, 3500K, AND 4000K 3. COMPATIBLE WITH DEDICATED LED LAMPING; SPECIFY DIMMING PROTOCOL: 0-10V, ELV, OR TRIAC 4. FOR MODIFICATIONS TO DIMENSIONS, ELECTRICAL REQUIREMENTS, AND OTHER SPECIAL ORDERS, PLEASE CONTACT YOUR D'AC REPRESENTATIVE 				



Phone: 203.775.0172
 P.O. Box 165 | 20 Pocono Road | Brookfield CT 06804
 daclighting.com | cs@daclighting.com

As part of d'ac's continuing efforts to improve the product line, fixtures may be modified or discontinued without prior notice