




d5030 STADIO PENDANT

PROJECT: _____
 TYPE: _____
 QUANTITY: _____
 NOTES: _____

SPECIFICATION

CONSTRUCTION	Spun-aluminum or solid-copper shade
DIFFUSER	White opal acrylic diffuser
ACCENTS	Polished chrome trim, clamps and loops
CANOPY	5" diameter black canopy
MOUNTING	Standard ceiling junction box
CORD	Black, Three-conductor hanging cord Adjustable-height aircraft cable
VOLTAGE	120V or 277V
LIGHT SOURCE	Dedicated LED or medium base socket
SHADE DIMENSION	14" diameter x 14" height
OVERALL HEIGHT	60"
CODE COMPLIANCE	UL listed, cUL (ETL/ETLc for LED) certified for dry locations

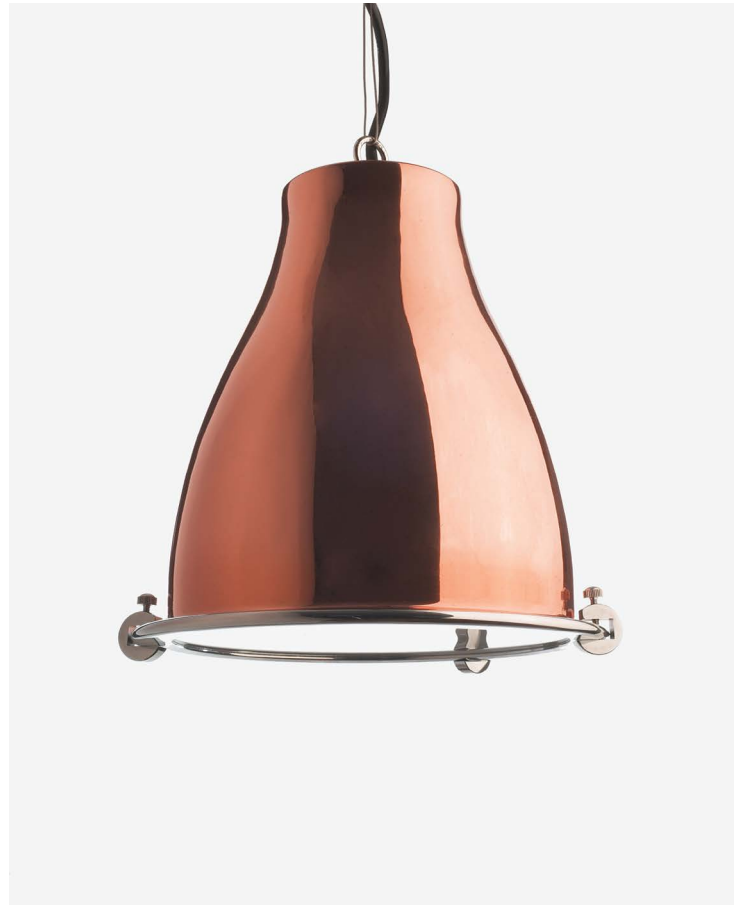

DIMENSIONS

CANOPY:



ORDERING INFORMATION

MODEL	LAMPING	VOLTAGE	FINISH	OPTIONS
<input type="checkbox"/> d5030	LED12² 12W LED, 1104 TOTAL LUMENS LED16² 16W LED, 1472 TOTAL LUMENS LED35² 35W LED, 3500 TOTAL LUMENS 1M150⁷ 150W MAX, MEDIUM BASE, A TYPE	120¹ 120V 277 277V	PAINTED FINISHES BG BLACK GLOSS BL METALLIC BLUE RD METALLIC RED CU METALLIC COPPER T1 LIGHT TAN G2 MEDIUM GREY GM METALLIC GREEN MB MATTE BLACK MG METALLIC GREY YL BRIGHT YELLOW WH WHITE GLOSS SPECIAL COLOR FINISH SCF _____	INCP³ INNER SHADE IN RAW COPPER COIL COILED ELECTRICAL CORD DIM⁴ DIMMING: 0-10V, ELV, OR TRIAC STEM⁵ RIGID 1/2" DIAMETER STEM TR⁶ FOR USE WITH TRACK SYSTEMS METAL FINISHES AL BRUSHED ALUMINUM PA POLISHED ALUMINUM COPPER FINISHES CPL POLISHED COPPER (LACQUERED) CBL BRUSHED COPPER (LACQUERED) CPU POLISHED COPPER (UNLACQUERED) CBU BRUSHED COPPER (UNLACQUERED)
NOTES 1. FIXTURES ARE FACTORY PREWIRED FOR 120V 2. 3000K IS THE STANDARD COLOR TEMPERATURE UNLESS OTHERWISE SPECIFIED; ALSO AVAILABLE IN 2700K, 3500K, AND 4000K 3. STANDARD FIXTURE WITH INNER SHADE PAINTED WHITE 4. SPECIFY DIMMING PROTOCOL: 0-10V (FOR 35W/40W LED LAMPING, THE STEM OPTION MUST BE ADDED), ELV, OR TRIAC 5. FIXED LENGTH, NOT FIELD-ADJUSTABLE; CUSTOMER TO SPECIFY OAH 6. ADAPTER AND TRACK SUPPLIED BY INSTALLER 7. 120V ONLY. FIXTURE SUPPLIED LESS LAMPS; LAMPS MAY BE ORDERED FROM D'AC 8. FOR ADDITIONAL MODIFICATIONS, PLEASE CONTACT YOUR D'AC REP				



Phone: 203.775.1805
 P.O. Box 165 | 20 Pocono Road | Brookfield CT 06804
 daclighting.com | cs@daclighting.com

As part of d'ac's continuing efforts to improve the product line, fixtures may be modified or discontinued without prior notice