




d5460

SMALL PELAGIC PENDANT


PROJECT: _____
 TYPE: _____
 QUANTITY: _____
 NOTES: _____

SPECIFICATION

CONSTRUCTION	Spun-aluminum or copper shade
DIFFUSER	Acrylic diffuser
ACCENTS	Polished chrome trim, clamps and loops
CANOPY	5" diameter black canopy
MOUNTING	Standard ceiling junction box
STEM⁴	Rigid 1/2" diameter stem
FINISH	Metal or powder-coat paint
VOLTAGE	120V or 277V
LIGHT SOURCE	Dedicated LED
SHADE DIMENSION	13.75" diameter x 14.2" height
CODE COMPLIANCE	UL listed, cUL (ETL/ETLc for LED) certified for dry locations

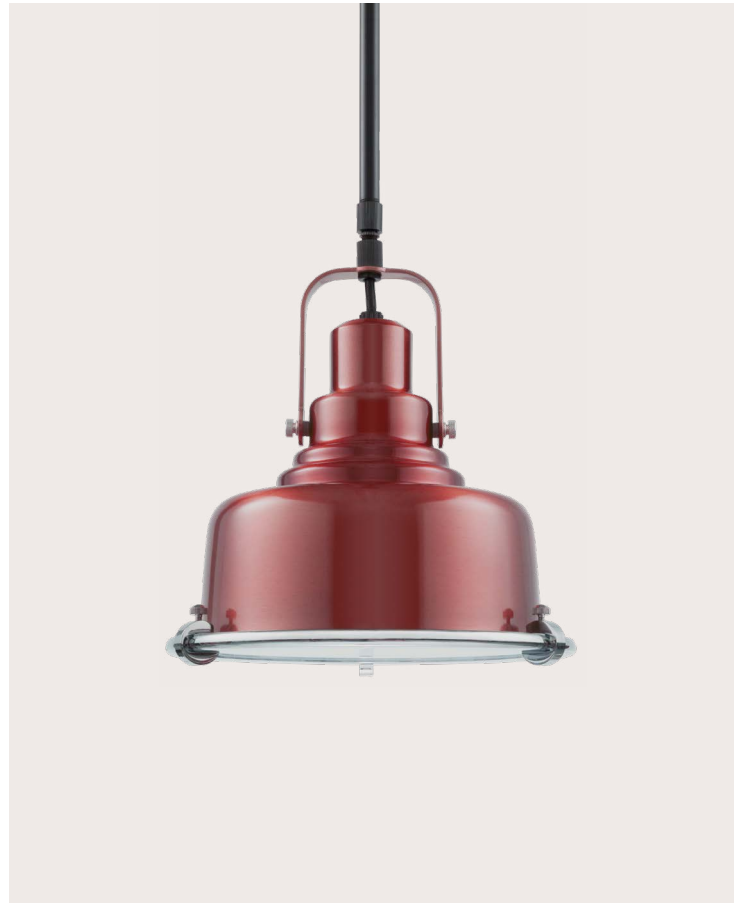

DIMENSIONS



CANOPY



ORDERING INFORMATION

MODEL	LAMPING	VOLTAGE	FINISH	OPTIONS
<input type="checkbox"/> d5460 	LED12² 12W LED, 1100 TOTAL LUMENS LED25² 25W LED, 2500 TOTAL LUMENS LED30² 30W LED, 3000 TOTAL LUMENS LED35² 35W LED, 3400 TOTAL LUMENS LED40² 40W LED, 3800 TOTAL LUMENS	120¹ 120V 277 277V	PAINTED FINISHES BG BLACK GLOSS BL METALLIC BLUE RD METALLIC RED CU METALLIC COPPER T1 LIGHT TAN G2 MEDIUM GREY GM METALLIC GREEN MB MATTE BLACK MG METALLIC GREY YL BRIGHT YELLOW WH WHITE GLOSS SPECIAL COLOR FINISH SCF _____	DIM³ DIMMING: 0-10V, ELV, OR TRIAC EMP⁵ EMERGENCY BATTERY PACK METAL FINISHES AL BRUSHED ALUMINUM PA POLISHED ALUMINUM COPPER FINISHES CPL POLISHED COPPER (LACQUERED) CBL BRUSHED COPPER (LACQUERED) CPU POLISHED COPPER (UNLACQUERED) CBU BRUSHED COPPER (UNLACQUERED)
NOTES 1. FIXTURES ARE FACTORY PREWIRED FOR 120V UNLESS OTHERWISE SPECIFIED 2. 3000K IS THE STANDARD COLOR TEMPERATURE 3. SPECIFY DIMMING PROTOCOL: 0-10V, ELV, OR TRIAC 4. FIXED LENGTH, NOT FIELD-ADJUSTABLE; CUSTOMER TO SPECIFY OAH 5. THE EMERGENCY BATTERY PACK OPTION REQUIRES THE USE OF A 12-1/4" DIAMETER CANOPY 6. FOR MODIFICATIONS TO DIMENSIONS, ELECTRICAL REQUIREMENTS, AND OTHER SPECIAL ORDERS, PLEASE CONTACT YOUR D'AC REPRESENTATIVE				



Phone: 203.775.1805
 P.O. Box 165 | 20 Pocono Road | Brookfield CT 06804
 daclighting.com | cs@daclighting.com

As part of d'ac's continuing efforts to improve the product line, fixtures may be modified or discontinued without prior notice