d5885

SQUARE VETROSO PENDANT

PROJECT:
TYPE:
QUANTITY:
NOTES:

SPECIFICATION

CONSTRUCTION	Aluminum and steel construction
DIFFUSER	Clear acrylic diffuser
MOUNTING	Standard ceiling junction box
FINISH	Metal or powder coat paint
VOLTAGE	120V or 277V
LIGHT SOURCE	22W LED
LUMEN OUTPUT	2200 total lumens
OPTIONAL DIMMING	0-10v dimming driver for dedicated LED
DIMENSIONS	25" W x 25" H x 25" OAH
CODE COMPLIANCE	UL listed, cUL (ETL/ETLc for LED) certified for dry locations

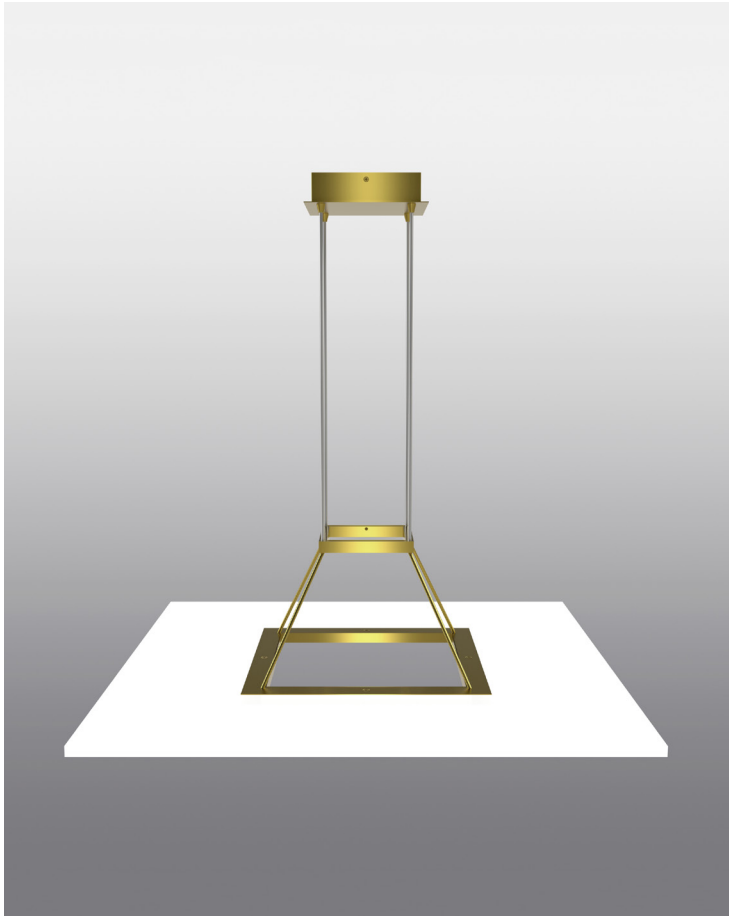

DIMENSIONS

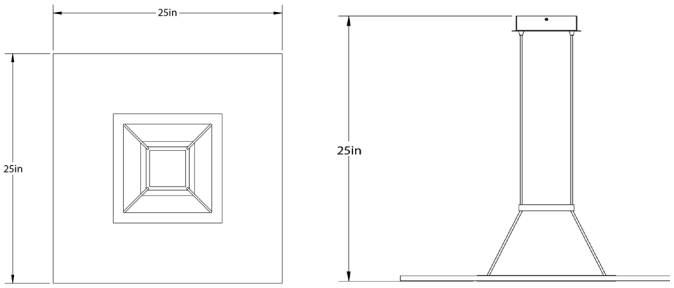

ORDERING INFORMATION

MODEL

- ☐ d5885

LAMPING

- ☐ LED22[2] 2200 TOTAL LUMENS, 90CRI

VOLTAGE

- ☐ 120[1] 120V
- ☐ 277 277V

FINISH

- ☐ AN METALLIC ANTHRACITE
- ☐ BG BLACK GLOSS
- ☐ BL METALLIC BLUE
- ☐ RB BRIGHT RED
- ☐ BZ METALLIC BRONZE
- ☐ CU METALLIC COPPER
- ☐ DR DAREDEVIL RED
- ☐ FG FUSION GREEN
- ☐ G1 LIGHT GRAY
- ☐ GM METALLIC GREEN
- ☐ MB MATTE BLACK
- ☐ MG METALLIC GRAY

OPTIONS

- ☐ DIM[3] 0-10V DIMMING DRIVER
- ☐ PBB PAINTED BRASS
- ☐ PR MEDIUM BLUE
- ☐ RD METALLIC RED
- ☐ T2 MEDIUM TAN
- ☐ WH WHITE GLOSS
- ☐ YL BRIGHT YELLOW
- ☐ SCF _____

NOTES

1. FIXTURES ARE FACTORY PREWIRED FOR 120V UNLESS OTHERWISE SPECIFIED
2. 3000K IS THE STANDARD COLOR TEMPERATURE UNLESS OTHERWISE SPECIFIED; ALSO AVAILABLE IN 2700K, 3500K, AND 4000K
3. 0-10V DIMMING DRIVER; COMPATIBLE WITH DEDICATED LED LAMPING. CONTACT FACTORY FOR ADDITIONAL DIMMING CONTROLS
4. FOR MODIFICATIONS TO DIMENSIONS, ELECTRICAL REQUIREMENTS, AND OTHER SPECIAL ORDERS, PLEASE CONTACT YOUR D'AC REPRESENTATIVE

Phone: 203.775.0172
P.O. Box 165 | 20 Pocono Road | Brookfield CT 06804
dacLighting.com | cs@dacLighting.com

As part of d'ac's continuing efforts to improve the product line, fixtures may be modified or discontinued without prior notice